


SPLIT SYSTEMS



-
- Remote Enable Port
-
- Error Alarm Port
-
- Twin Combination
-
- Refrigerant Leakage Detect
-
- Louvre Position Memory
-
- Fresh Air Inlet
-
- Temperature Compensation
-
- Anti-cold Air Function
-
- Low Ambient Cooling
-
- Emergency Use Function
-
- Wired Control
-
- Central Control Management
-
- Voice Control
-
- Smart Home
-
- WiFi

CEILING AND FLOOR

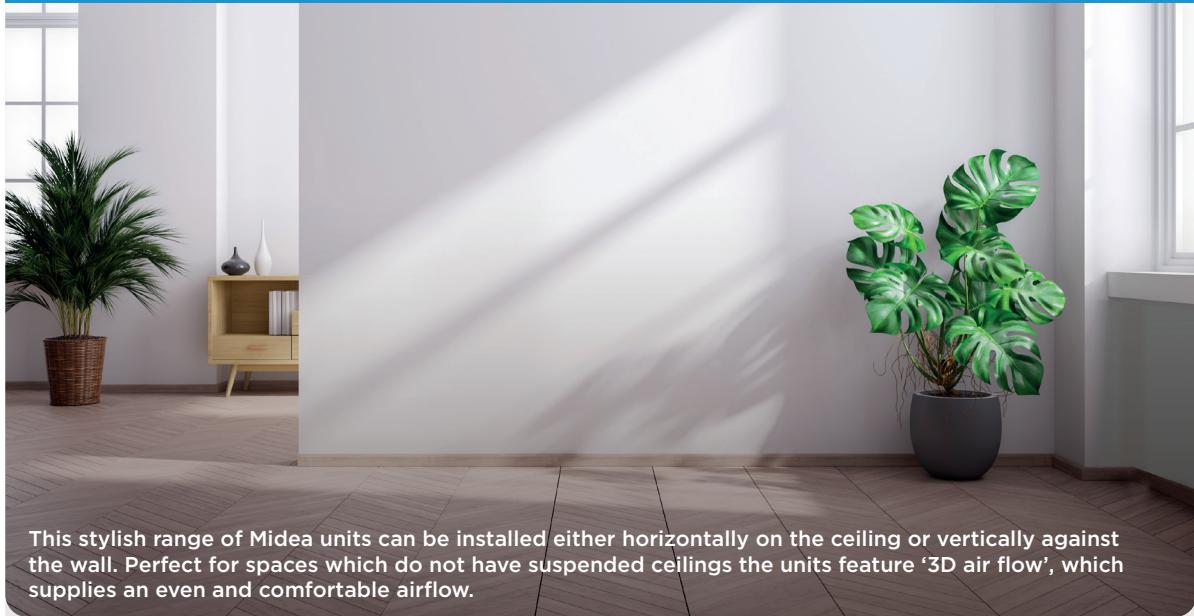

This stylish range of Midea units can be installed either horizontally on the ceiling or vertically against the wall. Perfect for spaces which do not have suspended ceilings the units feature '3D air flow', which supplies an even and comfortable airflow.

3D AIR FLOW

The unit has auto horizontal and vertical swing function which supplies an even and comfortable airflow throughout the room.

FRESH AIR INLET

Built-in fresh air inlet creates a more comfortable environment. Optional motor available to increase the "fresh air" effect.

VERTICAL OR HORIZONTAL INSTALLATION

The unit can be installed vertically or horizontally depending on your requirements and can even be installed in the corner of narrow ceilings.

LED DISPLAY

Built-in display for easy trouble shooting and system information.

TWIN COMBINATIONS

Outdoor unit sizes 36, 42, 48 & 55 can be installed with two indoor units for increased flexibility.

REMOTE SIGNAL

Built-in ports for on/off control and fault indication.

AUTOMATIC RESTART


In the event that the system stops working unexpectedly due to a power outage, it will restart automatically as soon as power is restored and will start operating in the mode set before the power was turned off.

EASY MAINTENANCE AND SERVICE

The system is specially optimized for easy maintenance and service.

SMARTHOME APP

New wired controller has built in WiFi, allowing you to operate your system from almost anywhere, at any time.

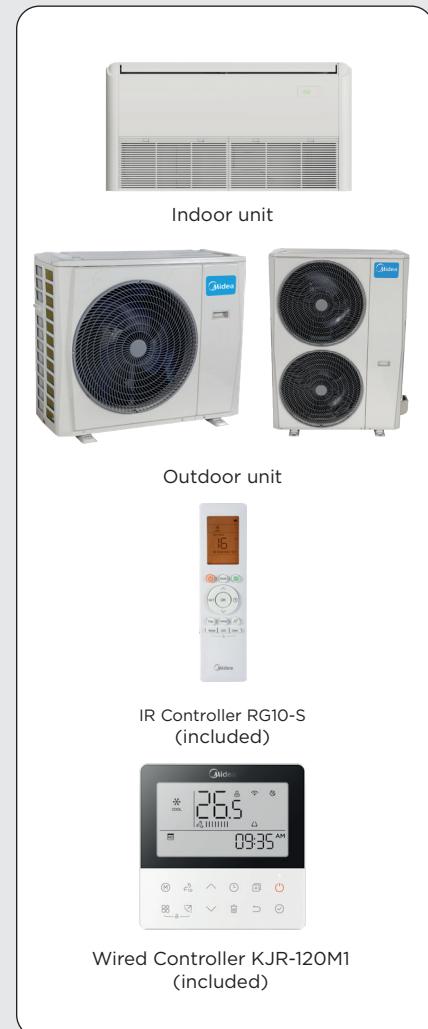

IR Controller RG10-S
(included)



Wired Controller KJR-120M1
(included)



SPLIT SYSTEMS



BREEZELESS+ CASSETTES, A6 DUCT, CEILING & FLOOR KJR-120M1 - 2-Core Controller



CEILING AND FLOOR

INDOOR			MUEU-18HRFNX(GA)	MUE-24HRFNX(GA)	MUE-36HRFNX(GA)	MUE-48HRFNX(GA)(42)
OUTDOOR			MOX330U-18HFN8-Q(GA)	MOX430U-24HFN8-Q(GA)	MOD30U-36HFN8-Q(GA)	MOD30U-42HFN8-Q(GA)
Nominal Cooling Capacity (min-max)	kW		5.28 (2.71-5.86)	7.03 (3.22-8.29)	10.55 (3.93-12.02)	12.31 (2.58-13.7)
Nominal Heating capacity (min-max)	kW		5.57 (2.42-6.30)	7.62 (2.72-8.29)	11.72 (2.78-12.78)	13.48 (3.37-14.07)
UK Total Cooling Capacity	kW		5.56	7.77	11.25	12.13
Seasonal Efficiency SEER/Class	W/W		6.2/A++	6.1/A++	6.2/A++	6.1/A++
Seasonal Efficiency SCOP/Class	W/W		4/A+	4/A+	4.1/A+	4/A+
Power supply (indoor power via outdoor)	V-Ph-Hz		220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz
Cooling Current (min-max)	A		6.0 (3.2-9)	10.54 (3.9-13.1)	17.0 (4.2-19.0)	18.8 (3.1-19.1)
Heating Current (min-max)	A		6.6 (2.7-7.3)	9.5 (3.5-12.7)	11.72 (2.78-12.78)	13.48 (3.37-14.07)
Max.Current	A		13.5	19	22.5	23
Recommended Fuse Size (Outdoor)	A		16	20	32	32
Interconnecting/Indoor Power Wiring	No.		4 Core 1mm ²			
Indoor air flow (High - Low)	m ³ /h		958/839/723	1192/1023/853	1955/1728/1504	2100/1850/1600
Indoor Sound Pressure Level (High-Low)	dB(A)		44/41/37/24	51/47/43/32	51.5/48/45/39	53/50/46/36
Indoor unit	Dimensions (WxDxH)	mm	1068x675x235	1068x675x235	1650x675x235	1650x675x235
	Packing (WxDxH)	mm	1145x755x318	1145x755x318	1725x755x318	1725x755x318
	Net/Gross Weight	Kg	28/33.3	28/33.1	41.5/48	41.7/48.5
Drainage water pipe dia.	mm		ODØ25	ODØ25	ODØ25	ODØ25
Outdoor air flow	m ³ /h		2100	3500	4000	4000
Outdoor Sound Pressure Level	dB(A)		53	57	60	60
Outdoor unit	Dimensions (WxDxH)	mm	805x330x554	890x342x673	946x410x810	946x410x810
	Packing (WxDxH)	mm	915x370x615	995x398x740	1090x500x885	1090x500x885
	Net/Gross Weight	Kg	32.5/35.2	43.9/46.9	66.9/71.5	71.0/75.0
Refrigerant	Type		R32	R32	R32	R32
	GWP		675	675	675	675
	Charged quantity	Kg	1.15	1.5	2.4	2.8
	Charged to	m	5	5	5	5
	Additional Charge	g/m	12	24	24	24
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Ø6.35/Ø12.7(1/4"/1/2")	Ø9.52/Ø15.9(3/8"/5/8")	Ø9.52/Ø15.9(3/8"/5/8")	Ø9.52/Ø15.9(3/8"/5/8")
	Max. pipe length	m	30	50	75	75
	Max. height difference	m	20	25	30	30
Operating temperature	Indoor (Cooling/ Heating)	°C	16-32/0-30	16-32/0-30	16-32/0-30	16-32/0-30
	Outdoor (Cooling/ Heating)	°C	-15-50/-15-25	-15-50/-15-24	-15-50/-15-24	-15-50/-15-24

Nominal Conditions: Cooling; indoor 27°C DB, 19°C WB, outdoor 35°C DB, 24°C WB.

Nominal Conditions: Heating; indoor 20°C DB, outdoor 7°C DB, 6°C WB.

UK Conditions: Summer: indoor 21°C DB, 15°C WB, outdoor 27°C DB.

Sound Pressure is measured 1.5m below the air-outlet at Nominal Conditions.