

## SRK71ZTL-W / SRC71ZTL-W

**7.1 (1.2~7.3)**

Indoor Unit : SRK71ZTL-W

Outdoor Unit : SRC71ZTL-W

### Specifications

R32

Indoor unit	SRK71ZTL-W			
Outdoor unit	SRC71ZTL-W			
Power source	1Phase, 220 - 240, 50Hz			
Nominal cooling capacity (Min~Max)	kW	7.1 (1.2~7.3)		
Nominal heating capacity (Min~Max)	kW	8.0 (1.1~9.1)		
Power consumption	Cooling/Heating	kW		
EER/COP	Cooling/Heating			
Max. running current	A	2.45 / 2.37		
Max. running current	A	2.90 / 3.38		
Max. running current	A	17.0		
Sound power level	Indoor	Cooling/Heating	dB(A)	61 / 61
Sound power level	Outdoor	Cooling/Heating		66 / 66
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	48 / 44 / 39 / 31
Sound pressure level	Indoor	Heating (Hi/Me/Lo/Ulo)		47 / 44 / 40 / 33
Sound pressure level	Outdoor	Cooling/Heating		53 / 54
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	m3/min	17.5 / 15.2 / 12.6 / 9.4
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)		18.9 / 17.7 / 14.6 / 11.6
Air flow	Outdoor	Cooling/Heating		43.0 / 40.9
Exterior Dimensions	Indoor	Height x Width x Depth	mm	294 x 998 x 230
Exterior Dimensions	Outdoor			
Net weight	Indoor / Outdoor	kg		9.5 / 33.0
Refrigerant	Type/GWP			R32 / 675
Refrigerant	Charge	kg/TCO2Eq		0.9 / 0.61
Refrigerant piping size	Liquid/Gas	Ø inch		6.35(1/4") / 12.7(1/2")
Refrigerant line (one way) length	m			Max.30
Vertical height differences	Outdoor is higher/lower	m		Max.20 / Max.20
Outdoor operating temperature range	Cooling	°C		-15~46
Outdoor operating temperature range	Heating			-15~24
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1
Energy Class (Cooling/Heating)				A++/A++
SEER				7.10
SCOP (Average climate)				4.40
Pdesign (cooling/heating(@-10°C))	kW			7.10/6.20
Annual Electricity Consumption (cooling/heating)	kWh/a			351/1972
Designated Heating Season				Average

• The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.




• Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

• 'tonne(s) of CO<sub>2</sub> equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

• SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281


## Schematics

SRK63ZTL-W  
SRK71ZTL-W

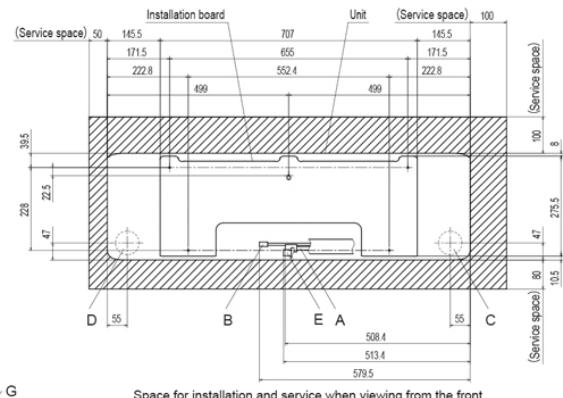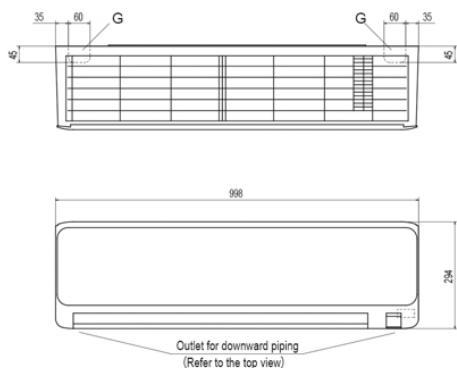




Symbol	Content
A	Gas piping
B	Liquid piping
C	Hole on wall for right rear piping
D	Hole on wall for left rear piping
E	Drain hose
F	Outlet for wiring (on both side)
G	Outlet for piping (on both side)

SRC20ZSX-W,-S SRC25ZSX-W,-S SRC35ZSX-W,-S SRC40ZSX-W1,-S SRC50ZSX-W2,-S  
SRC60ZSX-W1,-S SRC63ZR-W,-S SRC63ZTL-W SRC71ZTL-W

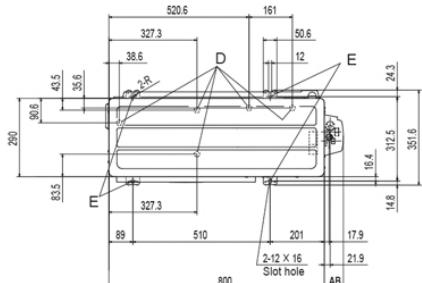

Symbol	Content
A	Service valve connection (gas side)
B	Service valve connection (liquid side)
C	Pipe/cable draw-out hole
D	Drain discharge hole
E	Anchor bolt hole

Minimum installation space				
Examples of installation dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open



\* The ZSX / ZR series does not have fin guard.